


# 2002 ATK 605 Enduro

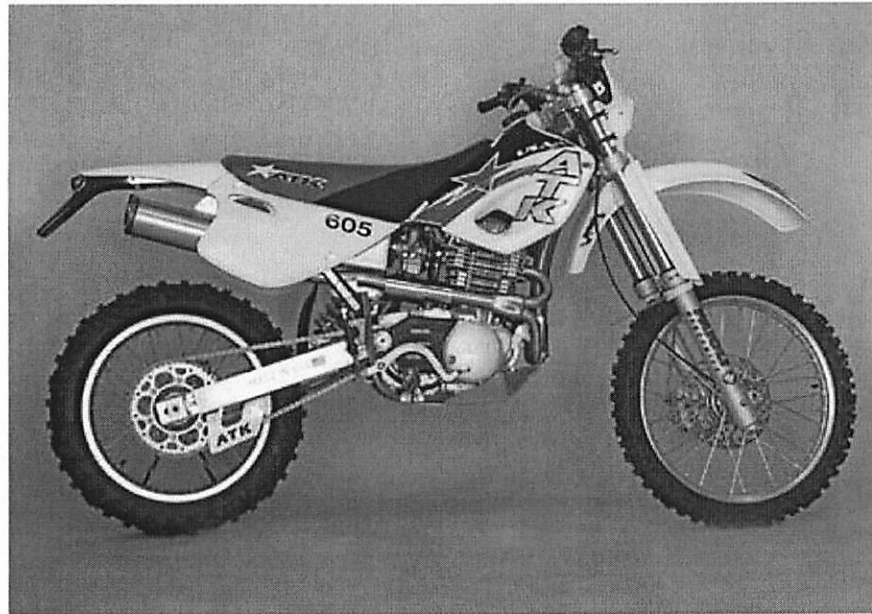

## Standard Features

- Reliable Rotax Air-Cooled Engine with Electronic and Kick starting
- Paioli Conventional 46mm Forks
- Ohlins POS Shock
- 6-Speed Transmission
- Talon Billet Aluminum Hubs
- Answer Protaper Handlebars
- D.I.D. V6 O-ring drive chain
- Braided stainless steel brake lines
- Nickel Plated exhaust pipe
- Motion Pro and Barnett control cables
- Radialite rear sprocket with muc grooves
- Halogen Headlight
- DOT approved Dunlop tires
- Keyed Ignition

## Engine Type:

Air-Cooled, 4-stroke, four valve, single

## Displacement:

598cc

## Bore & Stroke

97 x 81.0mm

## Compression Ratio:

9.5:1

## Carburetion:

40mm Dell'Orto

## Ignition

Electronic, 190w lighting output

## Starting System:

Electronic w/ Kick

## Transmission:

5-Speed, Wide Ratio

## Fuel Capacity:

3.6 Gallon

## Wheel Base:

59.0"

## Rake/Trail:

27 degrees/4.7"

## Seat Height:

36.5"

## Ground Clearance:

13.0"

## Front Wheel Travel:

11.8"

## Rear Wheel Travel:

13.2"

## Front Brake:

Brembo Dual piston, 260mm stainless steel rotor

## Rear Brake:

Brembo Dual piston, 220mm stainless steel rotor

## Front Tire:

80/100-21

## Rear Tire:

110/100-18

## Final Drive:

D.I.D. V6 O-ring drive chain

## Dry Weight:

284 lbs

**US ATK**

*Quality American Motorcycles*

1163 West 850 North  
Centerville, UT 84014

Ph:(801)298-8288 Fax:(801)299-0710

Web: [www.atkusa.com](http://www.atkusa.com)

Specifications Subject to Change Without Notice